


710W

N-Type Bifacial



Excellent temperature coefficient (Pmax): $-0.29/^{\circ}\text{C}$

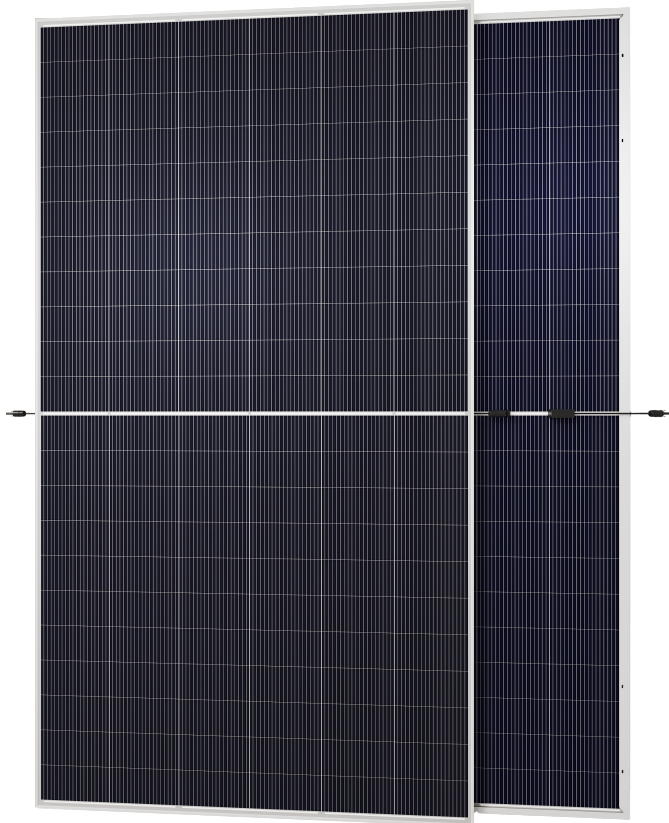

Excellent low-light performance: extended power generation up to 1H or so in the morning and evening



Has lower LID/LeTID attenuation




With a bifacial rate of $80\% \pm 10\%$, the bifacial power gain significantly reduces the LCOE as the backside is exposed to more light.



Guarantee



Warranty

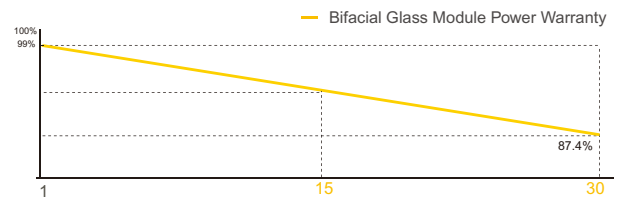

IEC61215:2021/IEC61730:2023

IEC61701/IEC62716/IEC60068/IEC62804

ISO9001:2015(Quality management systems)

ISO14001:2015(Environmental management systems)

ISO45001:2018(Occupational health and safety)

ISO14067:2018/PAS2050:2011

SPECIFICATION (STC) Irradiance at 1000 W/m², Cell Temp 25°C, Air Mass AM1.5

MODEL TYPE	ODA710-33V-MHD
Rated Peak Power-Pmax(Wp)	710.00
Maximum Power Voltage-Vmp(V)	41.15
Maximum Power Current-Imp(A)	17.25
Open Circuit Voltage-Voc(V)	48.90±3%
Short Circuit Current-Isc(A)	18.32±3%
Module Efficiency(%)	23.18

ELECTRICAL DATA(BNPI) Irradiance at 1000 W/m², Back irradiance 135 W/m², Cell Temp 25°C, Air Mass AM1.5

Rated Peak Power-Pmax(Wp)	787.00
Maximum Power Voltage-Vmp(V)	41.27
Maximum Power Current-Imp(A)	19.07
Open Circuit Voltage-Voc(V)	49.10±3%
Short Circuit Current-Isc(A)	20.17±3%

MECHANICAL CHARACTERISTICS

Cell Type (mm)	210*105 N-Type Mono
No. Of Cells	132(12*11)
Module Dimensions(mm)	2384*1303*30
Weight	38.00 kg
Bifacial Glass Front Glass(mm)	2.0mm AR Coating Tempered Glass
Bifacial Glass Back Glass(mm)	2.0mm Glazed Glass
Frame	Anodized Aluminium Alloy(Silver)
Junction Box	IP68, 1500VDC, 3 Schottky Bypass Diodes
Cables	4.0mm ² , Positive(+)300mm, Negative(-)300mm, Or Customized Length
Connector	IP68
Snow Load/Wind Load	5400Pa/2400Pa
Class Of Safety Protection	Class II
IEC Component Fire Rating	Class C

OPERATING PARAMETERS

Maximum System Voltage	1500V
Operational Temp	-40~+85 °C
Max Series Fuse Rating	30A
Nominal Module Operating Temp (NMOT)	45±2°C

TEMP COEFFICIENT


Temp Coefficient Of Pmax	-0.290%/°C
Temp Coefficient Of Voc	-0.250%/°C
Temp Coefficient Of Isc	+0.045%/°C

PACKING STANDARD 40ft (HQ)

Number Of Modules Per Pallet	37
Number Of Pallets Per Container	18
Number Of Modules Per Container	666

ASSEMBLY DRAWING

Unit:mm

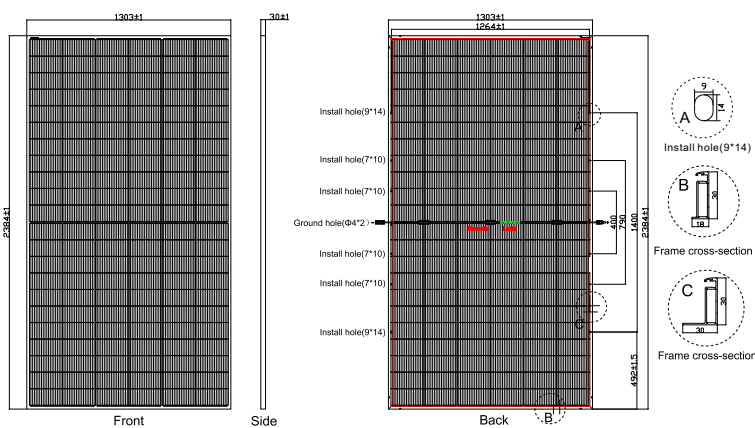

IV CURVE (710W)

